

ALABAMA

DEPARTMENT OF TRANSPORTATION

AERONAUTICS BUREAU 1409 COLISEUM BOULEVARD MONTGOMERY, ALABAMA 36110 PHONE (334) 242-6820

FAX (334) 353-6540



Joe McInnes TRANSPORTATION DIRECTOR

August 17, 2010

GOVERNOR

The Honorable Dexter McClendon Mayor of Greenville P.O. Box 158 Greenville, Alabama 36037

Subject:

Annual Inspection Report

Mac Crenshaw Memorial Airport

Dear Mayor McClendon:

An inspection of the Mac Crenshaw Memorial Airport was conducted by personnel of the Alabama Department of Transportation Aeronautics Bureau on August 4, 2010. The purpose of the inspection was to update the information currently on file regarding the airport and to ascertain compliance with the rules and regulations of the Alabama Department of Transportation governing licensed public-use airports within the State of Alabama.

Attached you will find a copy of the Annual Inspection Report for the airport. As noted in the report, the airport meets all requirements for the issuance of an operating license and the operating license is issued with no restrictions. However, there were some items noted that relate to the maintenance of the airport and should be corrected.

If you should have any questions concerning the inspection or corrective actions, please do not hesitate to contact the Aeronautics Bureau at (334) 242-6820.

Sincerely,

John C. Eagerton IV, D.P.A. Chief, Aeronautics Bureau

Copy: Mr. Rans Black FAA/ADO

> Mr. Travis Capps Airport Manager

Ryan Sisemore, PE Garver Engineers, LLC

AUGUST 4, 2010



ANNUAL INSPECTION REPORT



MAC CRENSHAW MEMORIAL AIRPORT
GREENVILLE, ALABAMA

TABLE OF CONTENTS

INTRODUCTION	PAGE	1
INSPECTION METHODOLOGY	PAGE	1
LICENSE STATUS	PAGE	2
APPROACH / DEPARTURE PATHS	PAGE	2
PRIMARY SURFACE	PAGE	4
RUNWAY SAFETY AREA	PAGE	4
AIRPORT MARKINGS	PAGE	5
WIND DIRECTION INDICATOR	PAGE	6
AIRPORT LIGHTING	PAGE	7
RUNWAY, TAXIWAY AND APRON CONDITIONS	PAGE	7
FUELING AREA REQUIREMENTS	PAGE	8
PROHIBITED ACTIVITIES	PAGE	8
SUMMARY	PAGE	9
APPENDIX 1	PAGE 1	10
AIRPORT SAFETY SELE-INSPECTION CHECKLIST		

August 4, 2010

Introduction:

<u>Code of Alabama 23-1-357(c)</u>. The department may perform such acts, issue and amend such orders and make, promulgate, or amend general or special rules, regulations, and procedures and establish minimum standards, consistent with the provisions of this article as it shall deem necessary to carry out the provisions of this article and to perform its duties hereunder, all commensurate with and for the purpose of protecting and insuring the general public interest, health, welfare, and safety. (Act 2000-220, 10.)

In accordance with the provisions of the Code of Alabama 23-1-357(c) an inspection of the Mac Crenshaw Memorial Airport was conducted by Mr. Kline Jeffcoat of the Alabama Department of Transportation Aeronautics Bureau on August 4, 2010.

The corrective actions that may be prescribed in this inspection report do not relieve the airport owner from compliance with any other Federal, State or local laws, ordinances or regulations that may be applicable. It is the responsibility of the airport owner to be aware of and obey all Federal, State or local laws, ordinances or regulations that may have a bearing on the corrective actions that may be specified in this report.

Inspection Methodology:

The inspection of the required State Approach/Departure Path and Federal Runway Protection Zones was accomplished by the use of approved engineering methods and equipment. The angles, locations and heights of trees or other objects within these areas were derived by the use of a Theodolite and electronic distance measuring device.

All other areas of the inspection were conducted visually and photographed for reference purposes.

The FAA Airport Design Standards referred to in this report were taken from the Airport Layout Plan (ALP) dated July 2001.

August 4, 2010

License Status:

Code of Alabama 23-1-375(a). ...a person or municipality may not operate an airport, restricted landing area, or other air navigation facility without a license issued by the department.

Based upon the findings of the inspection conducted on August 4, 2010, it was determined that the airport meets the requirements for the issuance of an operating license.

The inspection was conducted on the airport under the provisions of the Administrative Code for the following areas:

Approach and Departure Paths
 Administrative Code 450-9-1-.12(1)

 (See Appendix 1)

State Licensing Standards:

- For all hard surface runways the approach and departure path begins 200 feet from the runway end (runway threshold).
- The approach and departure path for all runways is centered along the extended runway centerline and extends for 1000 feet.
- For all hard surface runways with a displaced threshold, the approach and departure path begins at the point of displacement.
- The approach and departure path for all runways slopes up at a ratio of 20:1.
- All penetrations of the approach and departure paths, whether natural or manmade, constitute an obstruction to navigation and must be removed.
- The land beneath the approach and departure path must be controlled by the airport owner. This is accomplished by ownership of the property in fee simple or by written perpetual agreement with the owner of the land.

Inspection Results:

- Runway 14 No obstructions
- Runway 32 No obstructions
- While there are no obstructions to the approach/departure path a number of small pines and brush are beginning to grow just beyond the runway safety areas of both runways (See Photo # 1 and # 2).

August 4, 2010

Photo # 1 - Runway 14 Approach


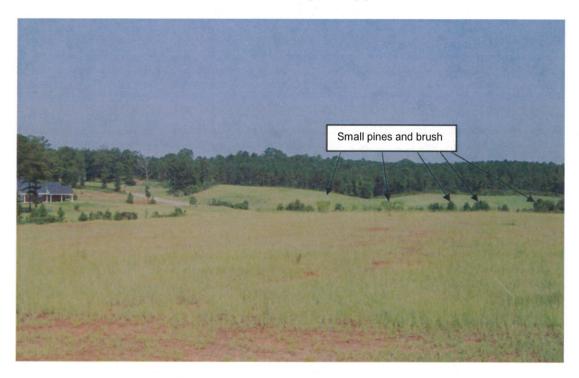


Photo # 2 - Runway 32 Approach

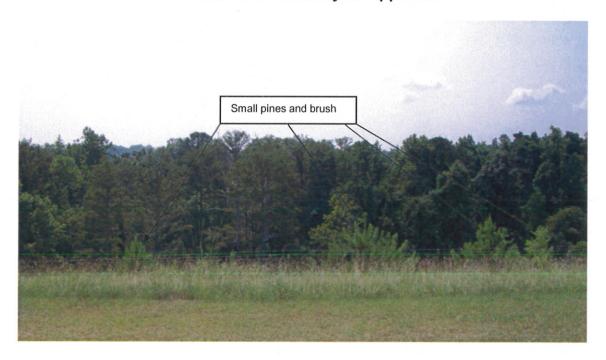

August 4, 2010

Maintenance Required:

Small pines and brush should be removed.

2. Primary Surface Administrative Code 450-9-1-.12(2)

State Licensing Standards:

 Primary Surface (See Appendix 1): The primary surface is 250 feet wide, centered on the runway centerline and extends 200 feet past the end of the marked runway. The primary surface is required to be free of all obstructions, manmade or natural. The only allowable objects are runway lights, guidance signs, or navigation equipment that by function is required to be within the primary surface boundaries.

Inspection Results:

• The primary surface meets state licensing requirements.

3. Runway Safety Area Administrative Code 450-9-1-.12(3)

State Licensing Standards:

• Runway Safety Area (Appendix 1): All runways are required to maintain an obstruction free area adjacent to each runway. This area is 120 feet wide, centered on the runway centerline, and extends for a distance of 200 feet past the runway end. The area must be compacted and graded smooth with no ruts, humps, depressions or other potentially hazardous surface variations. The slope along the longitudinal centerline shall not exceed a rise or fall of three percent in elevation relative to the runway end elevation. The lip from the top of the pavement to the grade adjacent to the runway should not exceed 3 inches.

Inspection Results:

The grade of the runway safety area meets state licensing requirements.

August 4, 2010

4. Airport Markings Administrative Code 450-9-1-.12(4)

State Licensing Standards:

 Airport Markings: All runways are required to be marked in a manner identifying the boundaries of the landing areas. The runway markings must be painted white and be maintained in a legible condition.

Inspection Results:

The runway markings are in good condition (See Photo # 3).





August 4, 2010

5. Wind Direction Indicator Administrative Code 450-9-1-.12(5)

State Licensing Standards:

 Wind Direction Indicators: All airports are required to have an operational wind direction indicator. It must be installed in a highly visible area and free from obstructions to ensure true wind direction and velocity. Night operations require the indicator be lighted.

Inspection Results:

• The wind direction indicator (wind cone) is operational (See Photo # 4).



Photo #4 - Wind Cone

August 4, 2010

6. Airport Lighting Administrative Code 450-9-1-.12(6)

State Licensing Standards:

 Airport Lighting: Runway lights and airport rotating beacons and a lighted wind direction indicator are required for night operations. All runway, threshold, and taxiway lighting shall be maintained in operational condition and shall not be obscured by natural growth such as grass and/or weeds.

Inspection Results:

The results of the lighting system inspection is as follows:

Threshold Lights - 1 inoperative Taxiway Lights - 2 inoperative Runway Lights - 1 inoperative

REIL – 2 inoperative (Runway 32)

RAPI – 0 inoperative

Maintenance:

Repair/ replace inoperative lights.

7. Runway, Taxiway and Apron Conditions Administrative Code 450-9-1-.12(7)

State Licensing Standards:

• Runway, Taxiway and Apron Conditions: All airport pavement surfaces associated with aircraft operations must be kept smooth and free of any defect or obstruction that could damage an aircraft. The lip of the airport pavement surfaces must not exceed three (3) inches in elevation from the top of the pavement to the shoulder. The drop should only be enough to allow sufficient drainage and not pose a control problem for aircraft exiting the runway. The aircraft parking apron is for the operation and parking of aircraft only and should be smooth and free of obstructions or defects that could cause damage to aircraft during operations.

August 4, 2010

Inspection Results:

• The airport pavement surfaces are in excellent condition.

8. Fueling Area Requirements Administrative Code 450-9-1-.12(8)

State Licensing Standards:

- Signs should be posted prohibiting open flames or smoking in fueling areas. The fueling facility must be labeled indicating the type fuel being dispensed.
- Grounding cables must be available.
- A fire extinguisher approved for the purpose of extinguishing petroleum product fires available during all fueling operations.
- Serviceable hoses and connections that would preclude a rupture or leaking of fuel.

Inspection Results:

 The fueling area meets the requirements established by the Alabama Department of Transportation. However, the State of Alabama Department of Agriculture and Industries may have additional requirements for fueling systems that were not considered during this inspection.

9. Prohibited Activities Administrative Code 450-9-1-.16

State Licensing Standards:

 Prohibited Activities: The use of any portion of the aircraft operations area, or airport property within the boundaries of the imaginary surfaces of a licensed airport for any purpose other than the operation of aircraft shall be deemed a non-aeronautical activity and is prohibited.

Inspection Results:

No prohibited activities were observed during this inspection.

August 4, 2010

Summary:

• The table below summarizes items noted in this report.

INSPECTION SUMMARY


Inspection Area	Violation/Maintenance	Corrective Action
Approach/Departure Path	Maintenance	Clear brush and small pines
Airport Lighting	Maintenance	Replace/Replace inoperative lights

Included with this report is an airport safety self-inspection checklist. This checklist is taken from FAA Advisory Circular (AC) 150/5200-18C and should be used in accordance with this AC to develop your own self-inspection program.

Please contact the Aeronautics Bureau of the Alabama Department of Transportation at (334) 242-6820 with questions concerning the Annual Inspection Report.

August 4, 2010

Approach and Departure Path Dimensions						
Inner	Outer					
Width	Width	Length	Acreage			
250 Feet	450 Feet	1,000 Feet	8.04 Acres			
Primary Surface Dimensions						
250 Feet Wide Centered Along Runway Centerline						
Extending 200 Feet Past the Runway End						
Runway Safety Area Dimensions						
120 Feet Wide Centered Along Runway Centerline						
Extending 200 Feet Past the Runway End						

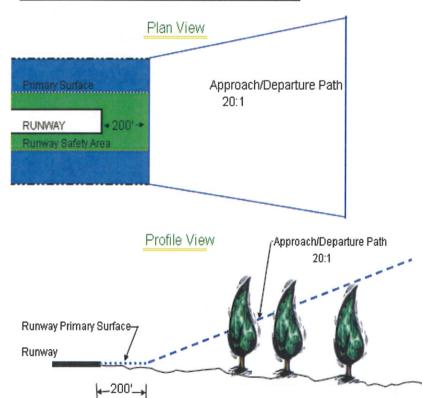

APPENDIX 1

AIRPORT SAFETY SELF-INSPECTION CHECKLIST

DATE:	-	DAY:			√ Satisfactory
				;	X Unsatisfactory
Day Insp	ector/Time:		Night Inspector/Time:		_

Day Inspector/Time:	Nigh	t Inspec	tor/Time:		
FACILITIES	CONDITIONS	D	N	REMARKS	RESOLVED BY (Date/Initials)
	Pavement lips over 3"				
	Hole – 5" diam. 3" deep				
	Cracks/spalling/heaves		1.17		
Pavement Areas	FOD: gravel/debris/sand				
	Rubber deposits				
	Ponding/edge dams				
	Ruts/humps/erosion				
	Drainage/construction				
	Support equipment/aircraft				
Safety Areas	Frangible bases				
	Unauthorized objects				
	Clearly visible/standard	+			
	Runway markings				
	Taxiway markings				
Markings	Holding position markings				
	Glass beads				
	Standard/meet Sign Plan				
	Obscured/operable	-			
Signs	Damaged/retroreflective	-			

FAOU ITIES	CONDITIONS			D	RESOLVED BY
FACILITIES	CONDITIONS	D	N	REMARKS	(Date/Initials)
	Obscured/dirty/operable	-			
	Damaged/missing				
	Faulty aim/adjustment				
Lighting	Runway lighting				
	Taxiway lighting				
	Pilot control lighting				
	Rotating beacon operable				
Navioral Alda	Wind indicators				
Navigational Aids	RENLs/VGSI systems				
Obstructions	Obstruction lights operable				
	Cranes/trees				
	Fencing/gates/signs				
	Fuel marking/labeling				
	Fire extinguishers				
Fueling Operations	Frayed wires				
	Fuel leaks/vegetation				
	Surface conditions				
	Snowbank clearances				
	Lights & signs obscured				
Snow & Ice	NAVAIDs				
	Fire access				
		+			